





## MIXY - THE RATIONAL

### FACTS

**Type:** Mixy plastering machine

**Use:** Renovation, small and large construction sites

**Innovation:** Single phase operation, 2.2 – 3.0 kW

### FEATURES

- For interior and exterior works
- Processing glue, ridge plaster, flowing screed, indoor and outdoor plaster
- Light weight, easy to assemble and dismount
- High quality components
- Single phase operation with condenser (230 V – 2.2 kW) or frequency inverter (230 V – 3.0 kW)
- Frequency inverter for more power in single phase mode
- Frame fitted with 4 wheels for increased flexibility






Booster pump  
(standard)



Protective cover



Easily accessible  
water armature

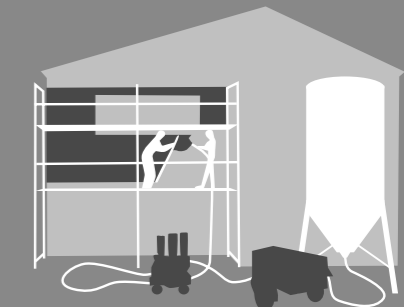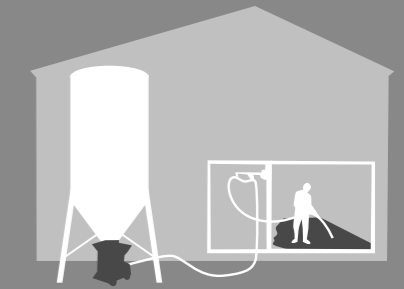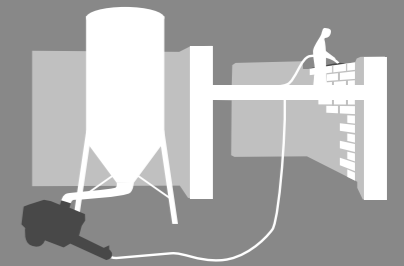

### TECHNICAL DATA

Power unit Mod. 1	230 V 50 Hz 2,2 kW
Electrical drive	42 V
Pump	D4 - ECO
Max. output*	approx. 16 lt/min
Transport pressure	15 bar
Range*	approx. 10 m
Compressor	180 lt/min
Water pressure	3 bar

### MEASURE + WEIGHT

Length	1640 mm
Width	600 mm
Max. height	1190 mm
Height of opening	1010 mm
Total weight	202 kg

### MACHINERY

Mortar hose	DN 25, 10 m, 40 bar
Air hose 1/2"	10 m
Spray gun	DN 25
Toolset	
Cleaning toolkit	

\* Approximate values that may vary according to type and consistency of the materials used