



MODEL ICTUS M300-2

Ratio: 4,3:1
Air supply: 2,5 bar min.
 8,0 max.
Max. working pressure:
 32 bar
Max. rec. delivery:
 20 litres/min
Weight: 12kg
Uses: Roof bolting, pack
 spraying & white
 washing
MK300-2: stub 300mm long
MK300-1: std tube 580mm long

SA Patent No. 96/0777



MODEL ICTUS MK III/S

Ratio: 5:1
Air supply: 3,0 bar min.
 8,0 max.
Max. working pressure:
 40 bar
Max. rec. delivery:
 38 litres/min
Weight: 16kg
Uses: Pack stressing, an-
 chor bolt grouting,
 foundation piling
MKIII version: tube 580mm long
MK500-1: std tube 580mm long

SA Patent No. 96/0777


MODEL ICTUS M60

Air supply: 2.5 bar min.
 8,0 max.
Max. working pressure:
 32 bar
Max. rec. delivery:
 24 litres/min
Weight: 16 kg
Uses: Spraying, anchor
 grouting and roof
 bolting
Rizer tube length: 580mm



MODEL ICTUS M60 STUB

Air supply: 2.5 bar min.
 8,0 max.
Max. working pressure:
 32 bar
Max. rec. delivery:
 24 litres/min
Weight: 18kg
Uses: Spraying, anchor
 grouting and roof
 bolting
Rizer tube length: 300mm

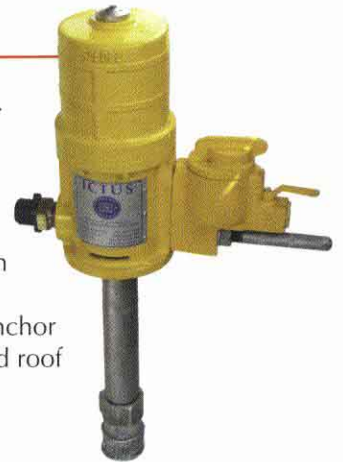

MODEL ICTUS M500 - DIVORCED

Ratio: 8,4:1
Air supply: 2,5 bar min.
 8,0 max.
Max. working pressure:
 60 bar
Max. rec. delivery:
 26 litres/min
Weight: 15 kg
Uses: Anchor grouting,
 pack stressing and
 spraying and white
 washing.
Available: M500-D stub version

SA Patent No. 96/0777



HAND GROUT INJECTION PUMP

MODEL ICTUS 010-1

Uses: Anchor grouting, non-weep
 prestressing foundation piling
Available: Model 010 std
 rizer tube ID 65mm,
Length: 580mm with
 side foot mount
 bracket

